



## GENERAL GUIDELINES

- Keep non-cutting hand above/away from cut path.

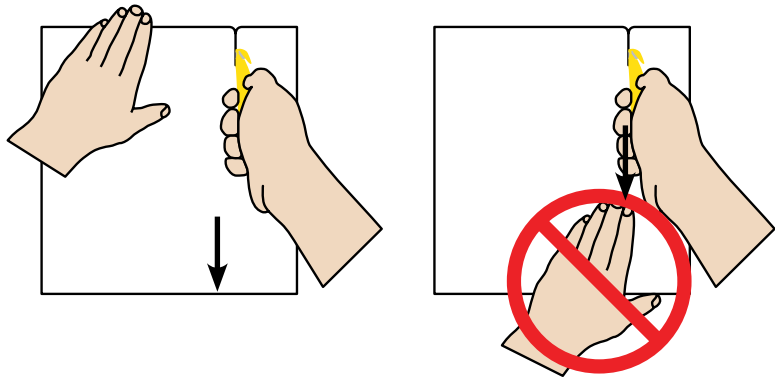

- Dispose of worn, dull product.

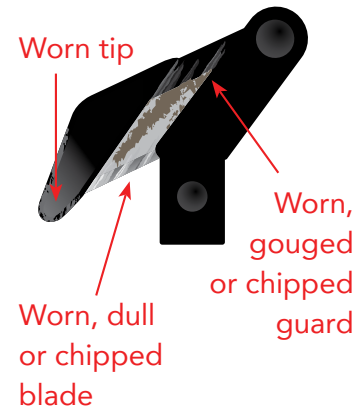

- Do **NOT** modify or tamper with product.




- Do **NOT** use the cutter to pry.



## APPLICATION-SPECIFIC GUIDELINES

### BOXES

- Align cutter opening at corner/edge of box.
- **Angle handle slightly to improve ease of cut.**
- Pull cutter with even force to cut box.

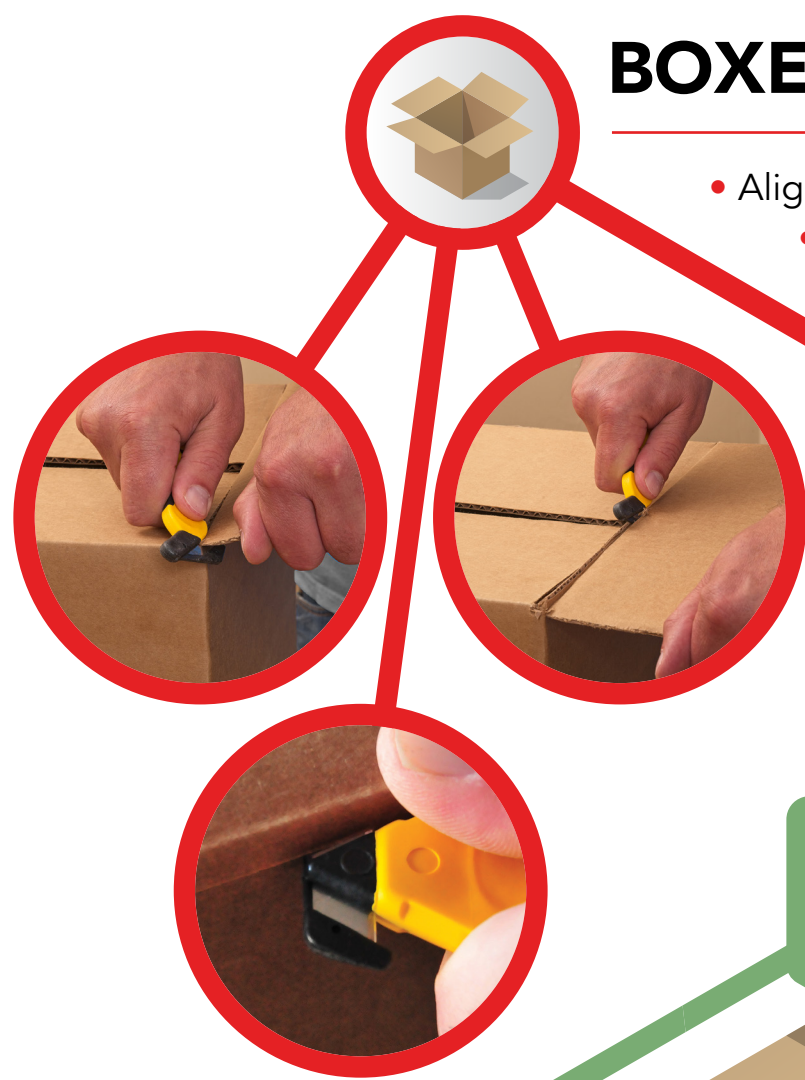

Tip

Choose the proper Klever product for the task.



Narrower opening for all around cutting applications



Wider opening for thicker substrates

### TAPE

- Pull through tape to cut.



Tip

Using the integrated tape splitter end **will reduce tape residue on the blade and prolong blade life.** Simply push splitter end down and through tape.

### PLASTIC / FILM / WRAP

- Pull cutter in a straight line with even force to cut through material.



Tip

Start the cut from the bottom of the material and pull up toward the top. **Keep material taut while cutting.**

### STRAPS / BANDING

- Start cut at edge of banding cutting downward at a 45° angle.



Tip

Do not use cutter to pry or lift under banding.



**Klever safety cutters are not designed to cut thick/heavy duty plastic or metal banding.**

Visit [www.kleverinnovations.net](http://www.kleverinnovations.net) for training videos and further details on application-specific use.

(800) 218-3068

**CAUTION:** Even though these are Safety products, please understand that blade edges are sharp.

**HANDLE WITH CARE**

**REDUCE CUT INJURIES • REDUCE DAMAGED GOODS • ALWAYS SAFETY READY**